



keystone

Keystone Pumps	
Tel: (604) 227-3555	
Website: www.keystonepumps.com	
PUMP MODEL	KST 8
CURVE NUMBER	A6415
REVISION	-
EFFECTIVE DATE	25 JAN 2018

DISCHARGE	INCHES	8
	MM	200
SUCTION	INCHES	8
	MM	200
IMPELLER Ø	INCHES	14.75
	MM	374.6
IMPELLER NBR	C6059	
IMPELLER TYPE	SEMI OPEN	
NUMBER OF VANES	2	
MAX. SOLID Ø	INCHES	3
	MM	76.2


SPEED	VARIABLE
POWER FRAMES	KST8
FREQUENCY	50 & 60 HZ
MAX. POWER	150 HP (112 kW)
MAX. RPM	1600 RPM

PERFORMANCE FOR CLEAR WATER @ 68° F / 20°C AND 1.0 S.G. CORRECT FOR OTHER CONDITIONS AND / OR SOLIDS EFFECT

1. KEYSTONE PUMPS RESERVES THE RIGHT TO CHANGE PUMP PERFORMANCE AND OR MODIFY OR DELETE IMPELLERS WITHOUT NOTICE.
2. CONTACT KEYSTONE PUMPS FOR OPERATION OUTSIDE THE RANGE OF THE PERFORMANCE CURVE.

RPM	650	750	850	950	1050	1150	1250	1350
FT	9	12	15	17	20	21	22	23
M	2.7	3.7	4.6	5.2	6.1	6.4	6.7	7

CALCULATE NPSHR PRIOR TO USING ABOVE TABLE.
DO NOT USE AS AVAILABLE SUCTION LIFTS.

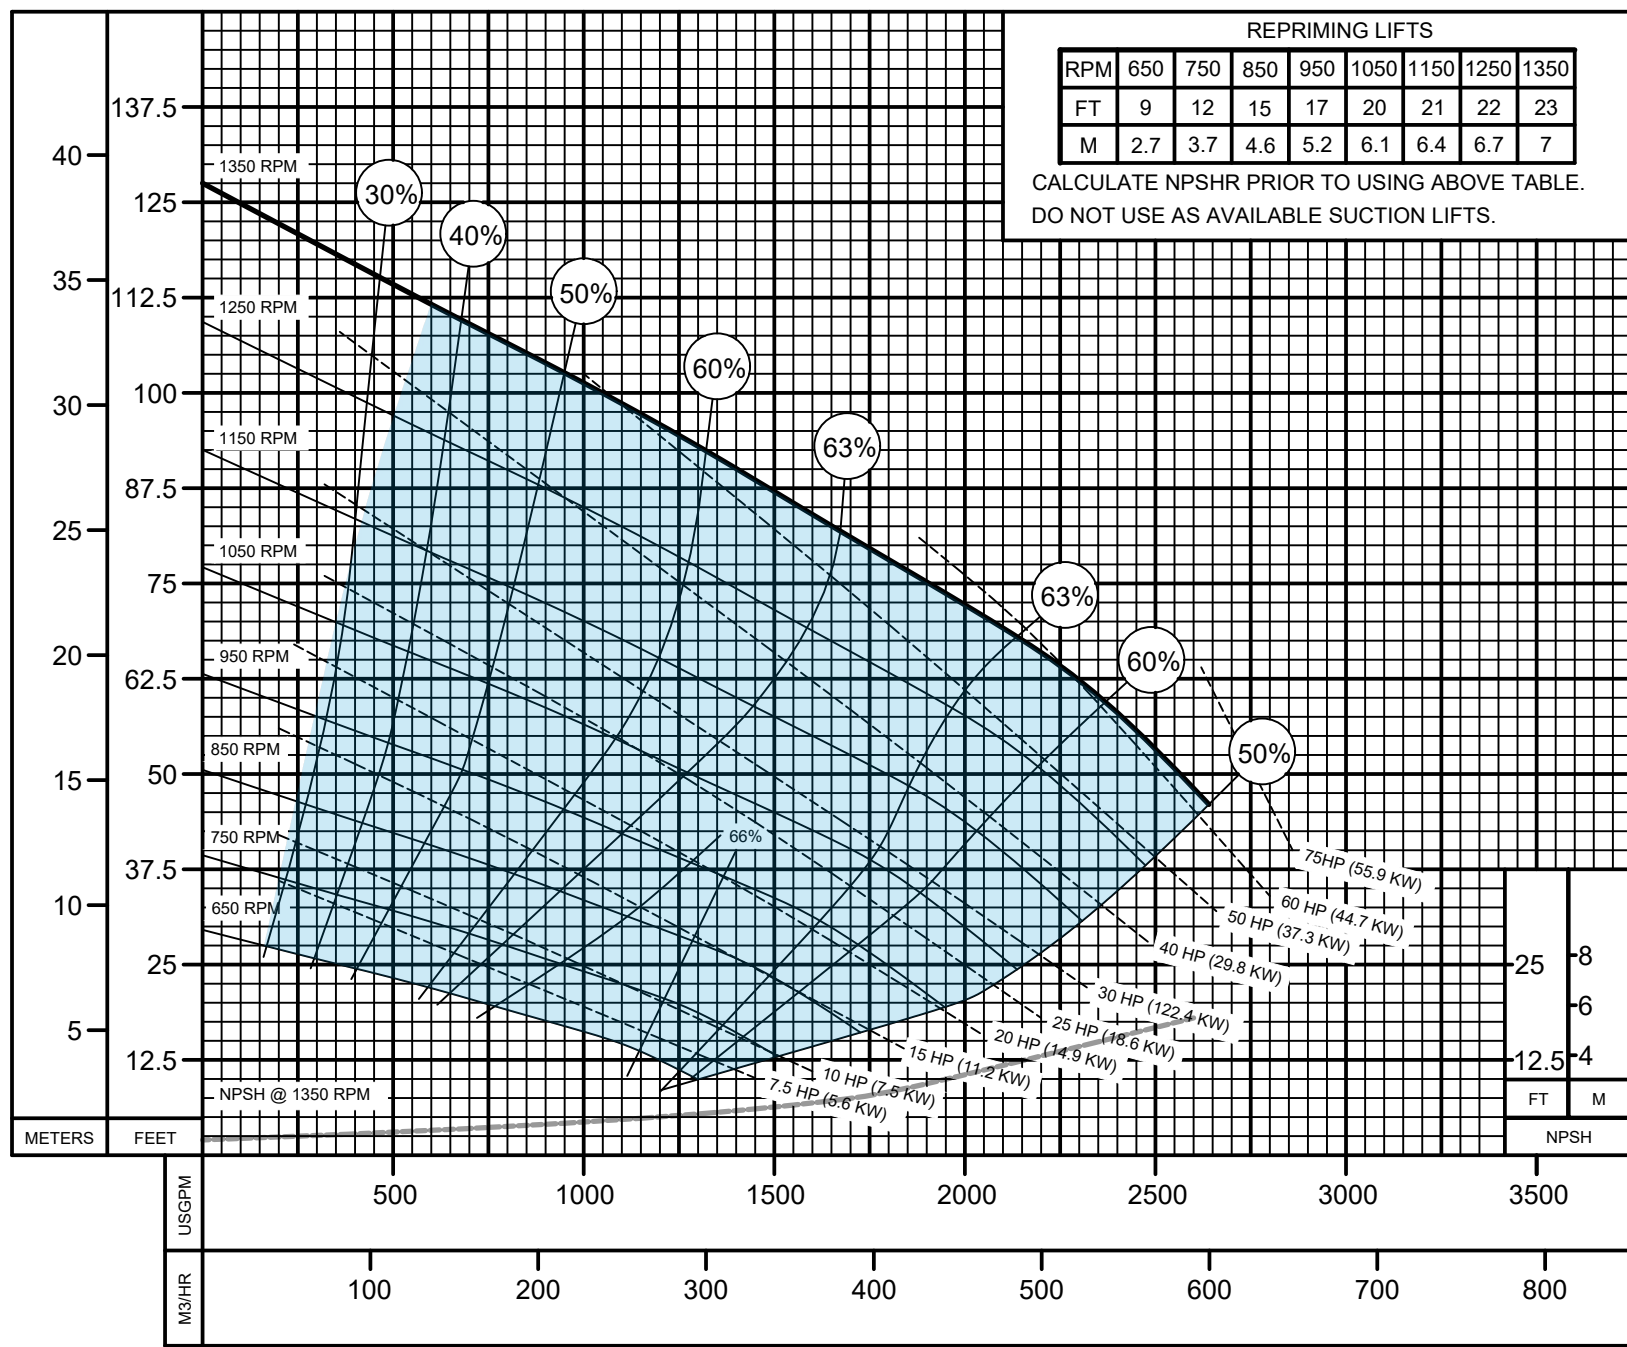

25	8
12.5	4
	FT
	M
	NPSH